


BIG ELEPHANT WIRE ROPE HOIST

TYPE : MONORAIL • SPEED : HOISTING DUAL SPEED (6:1) • TRAVERSING DUAL SPEED

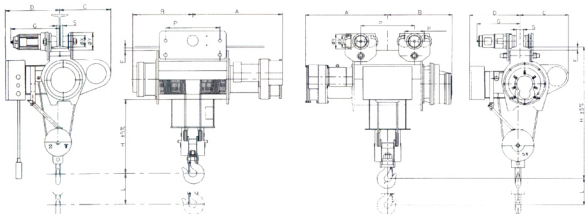

CAP		1	2	3	5	7.5	10	15		
Lift		60			90M		120M			
Hoisting	M/min	50Hz	6.0/1.0	5.6/0.9	5.4/0.9	5.4/0.9	4.2/0.7	4.8/0.8	4.3/0.7	
		60Hz	7.2/1.2	6.8/1.1	6.5/1.0	6.5/1.0	5.2/0.8	5.8/0.9	5.2/0.8	
	Kw	50Hz	1.5&0.37	3.7&0.75	5.5&0.75	7.5&1.5	7.5&1.5	11&2.2	15&2.2	
		60Hz					11&2.2	15&2.2	18.5&3.7	
Traversing	M/min	50Hz	15/5	15/5	14/4.7	13/4.3	13/4.3	13/4.3	12/4	
		60Hz	18/6	18/6	17/5.7	16/5.3	16/5.3	16/5.3	15/5	
	Kw	50Hz	0.37/0.12	0.37/0.12	0.37/0.12	0.75/0.25	0.75/0.25x2	0.75/0.25x2	1.1/0.37x2	
		60Hz								
Wire rope	Diameter		Ø8	Ø10 &Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	
	Struct		6 X 37							
	Nos		2	2&4				4		
Ed percent				High / Low speed : 40% / 25% ED (JEM 1393 II)						
Ambient temperature				-10°C to 40°C						
Protective construction				Weather proof type (Attach rain cover if using outdoors) JP 44 (IP 54) equivalent						
Power supply				3Ø 220V-600V 60Hz/50Hz						

CAP	TYPE	Approximate Dimension (mm)											Kg	
		L	A	B	C	D	F	X	Y	G	S	H		P
1 T	BECH-010	6	545	410	330	410	26	74	118	365	13	835	163	175
		9	600	460										185
		12	650	510										195
2 T	BECH-020	6	565	350	380	420	22	85	129	380	46	960	180/220	240
		9	595	380										270
		12	435	650										300
	BEAH-020	6	660	435										310
		9	725	510										320
		12	800	590										330
3 T	BEAH-030	6	695	485	435	510	25	95	138	385	38	1140	178/380	455
		9	795	585										495
		12	890	690										525
5 T	BEAH-050	6	750	555	470	475	23	135	168	470	32	1200	217/420	670
		9	865	665										695
		12	970	770										785
7.5 T	BEAH-075	6	920	720	540	565	38	135	168	480	82	1480	217/600	1200
		9	970	770										1330
		12	1020	820										1440
		6	955	750										1205
10 T	BEAH-100	6	1055	850	650	550	30	150	180	650	71	1570	239/600	1305
		9	1135	930										1405
		6	990	780										1680
15 T	BEAH-150	6	1090	880	680	600	22	190	230	680	64	1800	305/600	1880
		9	1190	980										2080
		6	990	780										1680